
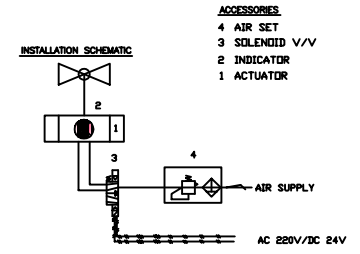


FOR APPROVAL

REV. NO	DATE	REVISION RECORD	DR	CK	APP
△					
△					

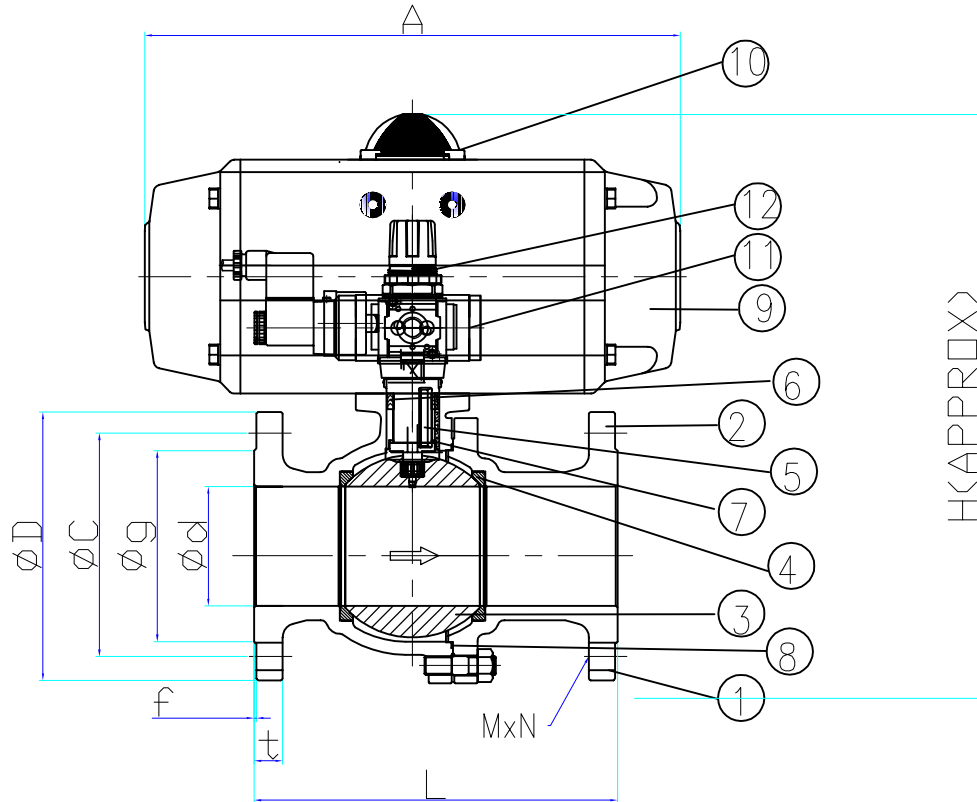

NO.	DESCRIPTION	MATERIAL	Q'TY	REMARKS
12	AIR SET	AL	1	
11	SOLENOID VALVE	AL	1	Ex-d
10	INDICATOR	AL	1	
9	ACTUATOR	AL	1	SINGLE ACTING
8	GASKET-BODY TO CLOSURE	RTFE	1	
7	THRUST WASHER	RTFE	1	
6	V-PACKING	RTFE	1SET	
5	STEM	A276 304	1	
4	SEAT	RTFE	2	
3	BALL	304SS	1	
2	CAP	SCS13	1	
1	BODY	SCS13	1	

* ACTUATOR SPECIFICATION

OPERATING MEDIUM	COMPRESSED DRY AIR
STANDARD OPERATING PRESSURE	5Kg/CM2
OPERATING PRESSURE RANGE	4 ~ 7 Kg/CM2
OPERATING ANGLE	90° (0° ~ +95°)
OPERATING TIME (CLOSE ←→ OPEN)	MAXIMUM 30 SECOND (SPEED CONTROL)
SERVICE TEMPERATURE	20°C ~ +80°C

(UNIT : mm)

SIZE	DIMENSION											MODEL
	d	g	C	D	f	t	L	MxN	A	H	Q'ty	
10K-25A	25	67	90	125	1	14	127	4xø19	171	166	2	BT-63S

PROJECT NAME			
MEGATEC			
SCALE	N. S.	PNEUMATIC ON-OFF BALL VALVE	
DRAWN BY	T.K.KIM	SINGLE ACTING, JIS 10Kg, FLANGE	
APPROVED BY	T.K.KIM	DATE	DRAWING NO.
		2023. 10. 05.	MG23-1005-01
		REV. NO	A