


2PC DIN & SCREW BALL VALVE LEVER OPERATING



DESIGN STANDARD : ASME B16.34 GB/T12237
 THREADED ENDS : PT, BSPT, NPT, DIN2999, DIN 259
 DIN EN ISO 228

PRODUCT STYLE : Q15F/Q14F
 WORKING PRESSURE : 1000PSI
 TEMPERATURE RANGE : -20°C ~ 120°C
 MATERIAL : ASTM-A351-CF8M, CF8, CF3M
 TEST&INSPECTION : API598 JB/T9092

MAIN PARTS MATERIALS

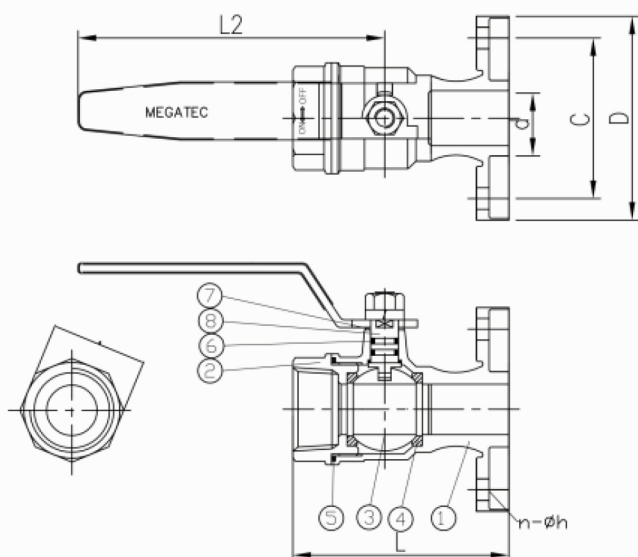

NO.	PART NAME	MATERIAL	QTY
1	BODY	CF8, CF8M, CF3M	1
2	CAP	CF8, CF8M, CF3M	1
3	BALL	CF8, CF8M, CF3M	1
4	SEAT	PTFE, RTFE	2
5	GASKET	PTFE, RTFE	1
6	SEAT RING	PTFE, RTFE	1
7	GLAND	CF8, CF8M, CF3M	1
8	SETM	CF8, CF8M, CF3M	1
9	HANDEL	CF8, CF8M, CF3M	1

DIMENSION					
DN	d	C	D	L	L2
25A	25	85	125	87	110
32A	32	100	135	100	130
40A	40	110	140	105	150
50A	50	125	155	123	150